# Hughes

FEATURING

BABY'S

DESIGNS

6—18 MONTHS



TWINPRUFE BABY WOOL

PRICE: 1/9



# -DESIGN No. 619-

(Illustrated Opposite)

# HUGHES TWINPRUFE BABY WOOL

MATERIALS REQUIRED: 7 Balls;

2 pairs needles Nos. 10 and 12; 3 small buttons; length of ribbon; length of elastic.

MEASUREMENTS (COAT): Length from top of shoulder 15½". Chest 20". Length of sleeve seam 7".

(LEGGINGS): Length of side fold 19". Length of front seam 10".

(BERET): Width round head 17".

(MITTENS): Length  $4\frac{1}{2}$ ".

TENSION: 7 sts. 1". 10 rows 1".

# COAT

BACK: Using No. 10 needles, cast on 117 sts. K 9 rows.

P 1 row.

Work in following pattern:-

1st Row: P2, \* leave the wool in front of work, sl. 3 purlwise, P2, repeat from \* to end.

2nd Row: P.

3rd Row: Repeat 1st row. 4th Row: Repeat 2nd row.

5th Row: K. 6th Row: P.

Repeat the last 6 rows and when work measures 11½", change to No. 12 needles and decrease for waist as follows:-

K4, \* K2 tog., repeat from \* to last 5 sts., K5. (63 sts.).

K 8 rows.

Next Row: (Wrong side of work) Change to No. 10 needles, P to end of row.

Next Row: Shape armhole by casting off 3 sts. at armhole edge, P2, \* leave wool in front, sl. 3 purlwise, P2, repeat from \* to last 3 sts., K3.

Next Row: Cast off 3 sts., P to end.

Next Row: \* P2, wool in front, sl. 3 purlwise, repeat from \* to last 2 sts., P2.

Next Row: P. Next Row: K. Next Row: P.

Continue in pattern and when armholes measure 3½", shape shoulders by casting off 16 sts. at the beginning of the next 2 rows. Cast off remaining sts.

LEFT FRONT: Using No. 10 needles, cast on 63 sts.

K 9 rows.

10th Row: K6, P to end.

Work in pattern as for back, keeping the 6 border sts. in garter st. When work measures 11½", change to No. 12 needles and decrease for waist as follows:-

K5, \* K2 tog., repeat from \* to last 6 sts., K6. (37 sts.).

K 3 rows.

Next Row: Work 1st small buttonhole as follows:-

K to last 4 sts., wl. fwd., K2 tog., K2.

K 4 rows.

Next Row: Change to No. 10 needles (wrong side of work), K6, P to end.

Next Row: Shape armhole by casting off 4 sts., work in pattern to end, working 6 border sts. in garter st.

Work 3 more buttonholes 1" apart.

Continued on Page 4.

# <del>``</del>

WARNING

The knitting instructions in this book have been worked out by experts using Hughes Knitting Wool. Do not accept substitution. Only by using the wool specified and following the instructions and tension given can you assure the success of your garment.

# **ABBREVIATIONS**

K. Knit.

P. Purl.

St. Stitch.

Tog. Together.

Sl. Slip.

Wl. Fwd. Wool forward.

W.R.N. Wool round needle.

P.S.S.O. Pass sl. st. over.

D.C. Double crochet.

St.St. Stocking stitch (K 1 row, P 1 row alternately).

Garter St. K every row.

Moss St. With an even number of sts., work as follows:-

1st Row: \* K1, P1 repeat from \* to end. 2nd Row: \* P1, K1 repeat from \* to end. Repeat these 2 rows.

With an uneven number of sts., work as follows:-

K1, \* P1, K1 repeat from \* to end. Repeat this row throughout.

# DESIGN No. 619 Continued.

When armhole measures  $2\frac{1}{2}$ ", shape neck by casting off 12 sts. at neck edge on the next row. Decrease 1 st. at neck edge on the next 3 rows, then every 2nd row until decreased to 16 sts.

When armhole measures  $3\frac{1}{2}$ , cast off.

RIGHT FRONT: Work as for left front, keeping the 6 garter sts. at opposite end. When work measures 11½", change to No. 12 needles and decrease for waist as follows:—K6, \* K2 tog., repeat from \* to last 5 sts., K5. (37 sts.).

K 8 rows.

Change to No. 10 needles and shape armhole by casting off 4 sts. at armhole edge of the next row (wrong side of work), P to last 6 sts., K6. Continue in pattern to correspond with the left front, omitting buttonholes.

SLEEVES: Using No. 12 needles, cast on

42 sts.

Work 19 rows rib of K1, P1. Change to No. 10 needles and P 1 row. Work in pattern as for back of coat, and increase 1 st. each end of every 6th row until increased to 60 sts. When sleeve seam measures 7", cast off 3 sts. at the beginning of every row until decreased to 18 sts. Cast off.

COLLAR: Using No. 10 needles, cast on 70

sts.

K 5 rows.

6th Row: K4, P to last 4 sts., K4.

Work in pattern keeping the 4 border sts. each end in garter st. When work measures 2", decrease as follows:—

K4, \* K2 tog., K4, repeat from \* to end.

(59 sts.).

Next Row: \* K1, P1, repeat from \* to last st., K1.

Next Row: \* P1, K1, repeat from \* to last st. P1.

Next Row: \* K1, P1, repeat from \* to last st., K1. Cast off.

TO MAKE UP: Using a warm iron and damp cloth, press on wrong side of work. Sew up shoulder seams, sew sleeves around armholes, then sew up side and sleeve seams. Sew on collar. Sew buttons on right front to correspond with buttonholes.

## **LEGGINGS**

RIGHT LEG: Using No. 10 needles, cast on 84 sts. Work in rib of K1, P1 for 4 rows. Next Row: Work holes for elastic as follows:—K1, \* w.r.n. twice, K2 tog., repeat from \* to last st., P1.

Work 11 rows of ribbing, (working w.r.n. twice as 1 st.).

Shape back as follows:-

Ist Row: K6, turn, P to end. Next Row: K12, turn, P to end. Next Row: K18, turn, P to end. Next Row: K24, turn, P to end.

Continue to shape in this way, working 6 sts. more each row until you have worked

60 sts., turn, P to end.

Work in st.st., increasing 1 st. each end of every 6th row until increased to 102 sts. Continue without shaping until shortest edge measures 10". Decrease 1 st. each end of every 2nd row until decreased to 64 sts., then each end of every 4th row until decreased to 54 sts. Continue without shaping until work measures 7" from crutch (measured at centre of work).

Next Row: Work ribbonholes. K1, \* wl. fwd., K2 tog., repeat from \* to last st., K1.

Next Row: P. Next Row: K. Next Row: P.

Divide sts. for foot as follows:-

1st Row: K34, turn.

2nd Row: \* K14, turn, repeat from \* 22 times, break off wool. With right side of work facing you and using right needle, pick up and K 12 sts. down side of foot, K 14 sts. at top of foot, pick up and K 12 sts. down other side of foot, K20. (78 sts.).

K 11 rows.

Shape foot as follows:-

1st Row: K1, K2 tog., K30, K2 tog., K8, K2 tog., K30, K2 tog., K1.

2nd and alternate Rows: K.

3rd Row: K1, K2 tog., K28, K2 tog., K8, K2 tog., K28, K2 tog., K1.

5th Row: K1, K2 tog., K26, K2 tog., K8, K2 tog., K26, K2 tog., K1.

7th Row: K1, K2 tog., K24, K2 tog., K8, K2 tog., K24, K2 tog., K1. Cast off.

LEFT LEG: Work as for right leg until the 11 rows of ribbing have been worked.

Next Row: K.

Next Row: Shape as follows:-P6, turn, K to end.

Next Row: P12, turn, K to end.

Next Row: P18, turn, K to end. Continue to work to correspond with right leg.

TO MAKE UP: Using a warm iron and damp cloth, press on wrong side of work. Sew up seams. Thread elastic at waist and ribbon at ribbonholes.

# BERET

Using No. 10 needles, cast on 120 sts. Work 6 rows rib of K1, P1. Shape as follows:—

**1st Row:** \* K11, K twice into next st., repeat from \* to end.

2nd and alternate Rows: P.

3rd Row: \* K12, K twice into next st., repeat from \* to end.

5th Row: \* K13, K twice into next st., repeat from \* to end.

7th Row: \* K14, K twice into next st., repeat from \* to end.

9th Row: \* K15, K twice into next st., repeat from \* to end.

11th Row: \* K16, K twice into next st., repeat from \* to end.

12th Row: P, increasing 1 st. each end of row.

Work 12 rows of pattern as for coat, decreasing 1 st. each end of the 12th row.

Decrease as follows:-

1st Row: \* K16, K2 tog., repeat from \* to end.

2nd and alternate Rows: P.

3rd Row: \* K15, K2 tog., repeat from \* to end.

5th Row: \* K14, K2 tog., repeat from \* to end.

7th Row: \* K13, K2 tog., repeat from \* to end.

Continue to decrease in this way until decreased to 20 sts. P 1 row.

Next Row: \* K2 tog., repeat from \* to end. Break off wool, thread end through a darning needle, then draw through all sts. and fasten off and sew up seam.

TO MAKE UP: Press with a warm iron and damp cloth on wrong side of work.

Have you bought enough wool to finish your garment? Don't take chances on being able to pick up exactly the same blend just when you want it.

Don't spend precious hours knitting up wool bought at different places and different times... different blends can vary, so play safe and buy all your wool at once. Be sure your wool is all taken from the same packet, and buy enough to complete your garment... it's worth it.

It is most important that you buy all your wool from the same blend. Successive batches may vary only slightly, but it could show in your jumper.

## **MITTENS**

Using No. 12 needles, cast on 42 sts. Work 16 rows rib of K1, P1. Change to No. 10 needles. Work ribbonholes, K1, \* wl. fwd., K2 tog., repeat from \* to last st., K1.

Next Row: P.
Next Row: K.
Next Row: P.

Work 22 rows of pattern as for coat, then decrease as follows:—

1st Row: \* K6, K2 tog., repeat from \* to last 2 sts., K2.

2nd and alternate Rows: P.

3rd Row: \* K5, K2 tog., repeat from \* to last 2 sts., K2.

5th Row: \* K4, K2 tog., repeat from \* to last 2 sts., K2.

7th Row: \* K3, K2 tog., repeat from \* to last 2 sts., K2.

9th Row: \* K2, K2 tog., repeat from \* to last 2 sts., K2.

11th Row: \* K1, K2 tog., repeat from \* to last 2 sts., K2.

12th Row: P.

Break off length of wool, thread through darning needle, then draw through all sts. and fasten off. Sew up seam.

TO MAKE UP: Press with a warm iron and damp cloth on wrong side of work. Thread ribbon at wrists.

	Booklet of latest Hughes  -fill in this coupon and post to:
A	dvertising Dept., F. W. Hughes, 30 Grosvenor Street, Sydney, N.S.W.
Please se 1959.	end me a free Hughes Style Guide for
Name	
Address	



# -DESIGN No. 959-

HUGHES TWINPRUFE BABY WOOL

(Also illustrated on Front Cover)

MATERIALS REQUIRED: 5 Balls; 2 pairs needles Nos. 10 and 12; 5 small buttons; 1 yd. ribbon, ¾" wide; 3 yds. narrow ribbon; silk for rosebuds.

MEASUREMENTS. FROCK: Length from top of shoulder  $17\frac{1}{2}$ ". Chest 20". Length of sleeve seam  $2\frac{1}{2}$ ".

BONNET: Width around face 12".

**BOOTEES:** Length of foot 4". Length of  $\log 4\frac{1}{2}$ ".

**TENSION:** 7 sts. 1". 9 rows 1".

# FROCK

BACK: Using No. 10 needles, cast on 139 sts.

1st Row: \* Moss st. 3, K5, repeat from \* to last 3 sts., moss st. 3.

2nd Row: \* Moss st. 3, P5, repeat from \* to last 3 sts., moss st. 3.

3rd Row: \* Moss st. 3, K into loop between sts., K1, P3 tog., K1, K into loop between sts., repeat from \* to last 3 sts., moss st. 3.

4th Row: Repeat 2nd row.

Repeat the last 4 rows and when work measures 9½", divide sts. for back opening as follows:—Work 67 sts. (leave remaining 72 sts. to be worked later), turn, cast on 5 sts., work as follows:—Moss st. 8, \* P5, moss st. 3, repeat from \* to end.

Continue in pattern keeping the 8 border sts. in moss st. When work measures 12½", change to No. 12 needles and decrease for waist as follows:—\* K2 tog., repeat from \* to last 8 sts., moss st. 8. (40 sts.).

Next Row: Moss st. 8, P to end.

Next Row: Work all sts. in moss st.

Repeat last row 3 times.

Next Row: Work ribbonholes as follows:— K1, \* w.r.n. twice, K2 tog., repeat from \* to last 7 sts., moss st. 7.

Next Row: Moss st. 8, P to end, working the w.r.n. twice as 1 st.

Work 4 rows moss st.

Change to No. 10 needles and shape armhole by casting off 2 sts. at the beginning of the next row, then \* moss st. 3, K5, repeat from \* to last 6 sts., moss st. 6.

Next Row: Moss st. 6, \* P5, moss st. 3, repeat from \* to end.

Next Row: \* Moss st. 3, K into loop between sts., K1, P3 tog., K1, K into loop between sts., repeat from \* to last 6 sts., moss st. 6.

Next Row: Moss st. 6, \* P5, moss st. 3, repeat from \* to end.

\*\* Next Row: \* Moss st. 3, K5, repeat from \* to last 6 sts., moss st. 6.

Next Row: Moss st. 6, \* P5, moss st. 3, repeat from \* to end.

Next Row: \* Moss st. 3, K into loop between sts., K1, P3 tog., K1, K into loop between sts., repeat from \* to last 6 sts., moss st. 6.

Next Row: Moss st. 6, \* P5, moss st. 3, repeat from \* to end.

Repeat the last 4 rows and when armhole measures  $3\frac{1}{2}$  work as follows:—Work in pattern on first 16 sts., then moss st. 22 sts.

Next Row: Moss st. 22, work in pattern on 16 sts.

Repeat the last 2 rows and cast off in moss st.

Page 6

# DESIGN No. 959 Continued.

Join wool and work other side to correspond until work measures  $12\frac{1}{2}$ ". Change to No. 12 needles and decrease for waist as follows:-Moss st. 8, \* K2 tog., repeat from \* to end.

Next Row: P to last 8 sts., moss st. 8.

Work 4 rows moss st.

Next Row: Work ribbonholes and 1st buttonhole as follows:-Moss st. 3, (work buttonhole), wl. fwd., K2 tog., K1, \* w.r.n. twice, K2 tog., repeat from \* to last st., K1.

Next Row: P, working w.r.n. twice as 1 st.

to last 3 sts., moss st. 3.

Continue to work to correspond with other side, making 4 more buttonholes 1" apart.

FRONT: Using No. 10 needles, cast on 139 sts. Work in pattern as for back for 12½". Change to No. 12 needles and decrease for waist as follows:-\* K2 tog., repeat from \* to last st., K1. (70 sts.).

Next Row: P.

Next Row: \* K1, P1, repeat from \* to end. Next Row: \* Pl, Kl, repeat from \* to end. Repeat last 2 rows.

Next Row: Work ribbonholes as follows:-K1, \* w.r.n. twice, K2 tog., repeat from \*

to last st., K1.

Next Row: P, working w.r.n. twice as 1 st. Next Row: \* K1, P1, repeat from \* to end. Next Row: \* P1, K1, repeat from \* to end. Repeat last 2 rows.

Next Row: Change to No. 10 needles, cast off 4 sts., K1, P1, \* K1, P1, K1, K5, repeat from

\* to last 8 sts., moss st. 3, K5.

Next Row: Cast off 4 sts., P1, \* K1, P1, K1, P5, repeat from \* to last 5 sts., K1, P1, K1, P2. Next Row: K2 tog., \* K1, P1, K1, K into loop between sts., K1, P3 tog., K1, K into loop between sts., repeat from \* to last 4 sts., K1, P1, K2 tog.

Next Row: \* K1, P1, K1, P5, repeat from \*

to last 4 sts., K1, P1, K2 tog.

\*\* Next Row: \* K1, P1, K1, K5, repeat from \* to last 3 sts., K1, P1, K1.

Next Row: \* K1, P1, K1, P5, repeat from \* to last 3 sts., K1, P1, K1.

Next Row: \* K1, P1, K1, K into loop between sts., K1, P3 tog., K1, K into loop between sts., repeat from \* to last 3 sts., K1, P1, K1. Next Row: \* K1, P1, K1, P5, repeat from \*

to last 3 sts., K1, P1, K1.

Repeat last 4 rows and when armholes measure 2½", shape neck as follows:-Work in pattern on 19 sts. (P1, K1) 12 times, work 16 sts. in pattern.

Next Row: Work 16 sts. in pattern, work 27 sts. in moss st., work 16 sts. in pattern.

Repeat last 2 rows.

Next Row: Work 19 sts., (leave on a spare needle), cast off 21 sts., work 19 sts.

Continue in pattern on last 19 sts. and when armhole measures 4", cast off. Join wool and work other side to correspond. mer brue to correspondi

SLEEVES: Using No. 12 needles, cast on 49

Work 5 rows moss st. Change to No. 10 needles and increase to 67 sts. as follows:-I twice into each of the 1st 2 sts., \* P2, P twice into next st., repeat from \* to last 2 sts., Pl, P twice into last st. Work in pattern and when work measures  $2\frac{1}{2}$ , decrease 1 st. each end of every row until decreased to 23 sts. Cast off.

LONG SLEEVES: Using No. 10 needles, cast on 36 sts. Work 15 rows of K1, P1 rib. Next Row: Increase to 67 sts. as for short

sleeves. Work in pattern and when work measures

 $5\frac{1}{2}$ , decrease 1 st. each end of every row until decreased to 23 sts. Cast off.

TO MAKE UP: Press lightly on wrong side of work with a warm iron and damp cloth. Sew up shoulder seams. Sew in sleeves. Sew ap side and sleeve seams and sew on buttons. Thread ribbon at waist. Work rosebuds.

# BONNET

Using No. 10 needles, cast on 83 sts. Work in pattern for 4½", then shape back as follows:-

\* K10, K2 tog., repeat from \* to last 11 sts., K11.

2nd and alternate Rows: P.

3rd Row: \* K9, K2 tog., repeat from \* to end.

5th Row: \* K8, K2 tog., repeat from \* to

7th Row: \* K7, K2 tog., repeat from \* to end.

9th Row: \* K6, K2 tog., repeat from \* to end.

11th Row: \* K5, K2 tog., repeat from \* to

13th Row: \* K4, K2 tog., repeat from \* to end.

15th Row: \* K3, K2 tog., repeat from \* to

17th Row: \* K2, K2 tog., repeat from \* to

19th Row: \* K1, K2 tog., repeat from \* to end.

Continued on Page 10.

# -DESIGN No. 922-

HUGHES TWINPRUFE BABY WOOL

MATERIALS REQUIRED: 2 Balls;

2 pairs needles Nos. 10 and 12; 6 buttons; press stud.

MEASUREMENTS: Length from top of shoulder 10". Chest 20". Length of sleeve seam 5".

**TENSION:** 8 sts. 1". 10 rows 1".

**BACK:** Using No. 12 needles, cast on 72 sts. Work in rib of K1, P1, for  $1\frac{1}{4}$ ". Change to No. 10 needles, K 1 row on wrong side. Work as follows:—

1st Row (Right side): K.

2nd Row: \* K1, P1, repeat from \* to end. 3rd Row: K.

4th Row: K.

Repeat these 4 rows for  $2\frac{1}{4}$ ", then increase 1 st. each end of every 4th row until increased to 82 sts. When work measures  $5\frac{1}{2}$ ", cast on 4 sts. at the beginning of the next 6 rows. Cast on 12 sts. at the beginning of the next 2 rows. (130 sts.). Continue without shaping until work measures  $9\frac{1}{4}$ ". Shape sleeves and shoulders by casting off 10 steat the beginning of the next 10 rows. Cast off remaining 30 sts.

LEFT FRONT: Using No. 12 needles, cast on 42 sts. Work in rib of K1, P1, for  $1\frac{1}{4}$ ".

Change to No. 10 needles.

Next Row: (Wrong side) Rib 8 sts. and leave on a spare needle for border, K to end of

row.

Continue in pattern on these 34 sts. for  $2\frac{1}{4}$ ", then increase 1 st. at side seam edge every 4th row until increased to 39 sts. When work measures  $5\frac{1}{2}$ ", cast on 4 sts. at sleeve edge every 2nd row 3 times, then 12 sts. once. (63 sts.). When work measures 9", cast off 6 sts. at neck edge of the next row. Decrease 1 st. at neck edge on the next 2 rows.

Next Row: Cast off 10 sts. at sleeve edge,

work to last 2 sts., K2 tog.

Work 1 row.

Repeat last 2 rows until all sts. are decreased **BORDER**: Work the 8 border sts. in rib of K1, P1, on No. 12 needles for 9" from beginning, when slightly stretched. Leave on a spare needle.

RIGHT FRONT: Using No. 12 needles, cast on 42 sts. Work in rib of K1, P1, for  $\frac{1}{2}$ ". Next Row: Rib 4, cast off 2 sts., work to end.

Next Row: Work to last 4 sts., cast on 2 sts., rib 4.


Continue to work to correspond with left



front, working shapings at opposite ends and make 5 more buttonholes in border 1½" apart.

NECKBAND: Join sleeve and shoulder seams. With right side of work towards you, using No. 12 needles, rib the 8 sts. of right front border, pick up and K about 66 sts.

Page 8

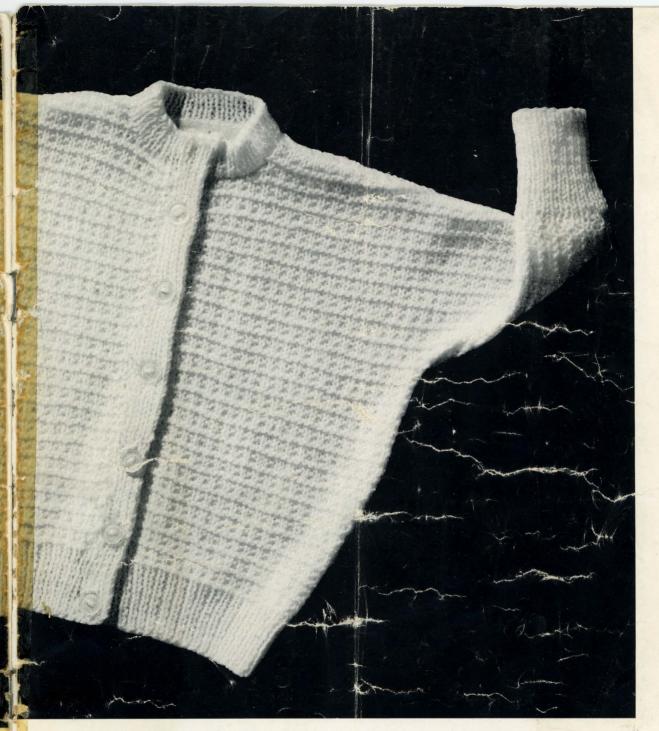

around neck, then rib the 8 sts. of left front border. Work in rib of K1, P1, for \(^34''\). Cast off in ribbing.

CUFFS: With right side of work towards you, using No. 12 needles, pick up and K about 40 sts. along edge of sleeves. Work in rib of

K1, P1 for 2". Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Stitch borders to each front. Sew up side and underarm seams. Sew buttons on left front and a press stud at neck edge.

# DESIGN No. 959 Continued.

21st Row: \* K2 tog., repeat from \* to end. Break off length of wool. Thread end through darning needle and draw wool through all sts. into a circle and fasten off. Sew up back seam.

TO MAKE UP: Press lightly on wrong side with a warm iron and damp cloth. Sew on ribbon for ties. Work rosebuds.

# BOOTEES

Using No. 10 needles, commence at top and cast on 43 sts. Work in pattern as for frock, working the 4 rows of pattern 8 times. Work 2 rows moss st.

Next Row: Work ribbonholes:-K1, \* wl. fwd., K2 tog., repeat from \* to end.

Next Row: P.

Work 2 rows moss st.

Next Row: K16, moss st. 3, K5, moss st. 3 (leave remaining 16 sts. on a spare needle) turn. Continue on centre 11 sts. as follows:-Moss st. 3, P5, moss st. 3, turn.

\*\* Next Row: Moss st. 3, K the loop between sts., K1, P3 tog., K1, K into loop between sts., moss st. 3.

Next Row: Moss st. 3, P5, moss st. 3. Next Row: Moss st. 3, K5, moss st. 3.

Next Row: Moss st. 3, P5, moss st. 3.

Repeat last 4 rows 4 times.

Next Row: Moss st. 3, K into loop between sts., K1, P3 tog., K1, K into loop between sts., moss st. 3, pick up and K 12 sts. down side of flap, K16.

Next Row: K39, pick up and K 12 sts. down other side of flap, K16. (67 sts.).

K 6 rows. Shape as follows:-

1st Row: K1, K2 tog., K28, K2 tog., K1, K2 tog., K28, K2 tog., K1.

2nd and alternate Rows: K.

3rd Row: K1, K2 tog., K26, K2 tog., K1, K2 tog., K26, K2 tog., K1.

5th Row: K1, K2 tog., K24, K2 tog., K1, K2 tog., K24, K2 tog., K1.

7th Row: K1, K2 tog., K22, K2 tog., K1, K2

tog., K22, K2 tog., K1. 9th Row: K1, K2 tog., K20, K2 tog., K1, K2 tog., K20, K2 tog., K1.

11th Row: K1, K2 tog., K18, K2 tog., K1, K2 tog., K18, K2 tog., K1. 12th Row: K. Cast off.

TO MAKE UP: Press lightly on wrong side of work with a warm iron and damp cloth, Thread ribbon through ribbonholes and work rosebuds.





# -DESIGN No. 903-

HUGHES TWINPRUFE BABY WOOL

Also illustrated back cover

MATERIALS REQUIRED: 4 Balls;

2 pairs needles Nos. 10 and 12; 3 yds. ribbon; silk for rosebuds.

MEASUREMENTS (COAT): Length from top of shoulder 12½". Chest 20". Length of sleeve seam 6".

(BONNET): Width around face 11".

(BOOTEES): Length of leg  $4\frac{1}{2}$ ". Length of foot 3".

TENSION: 7 sts. 1". 9 rows 1".

## COAT

BACK: Using No. 10 needles, cast on 133 sts. loosely. (Do not K into back of sts.).

1st Row: K1, P to last st., K1.

2nd Row: \* K1, P2 tog., P the loop between sts., P1, P loop between sts., P2 tog., repeat from \* to last st., K1.

Repeat last 2 rows for 9", ending with a P

row which is wrong side of work.

Change to No. 12 needles and decrease as follows:—K1, \* K2 tog., repeat from \* to end of row. (67 sts.)

K 3 rows. Work ribbonholes as follows:—K1, \* w.r.n. twice, K2 tog., repeat from \* to end of row.

K 2 rows, working w.r.n. twice as 1 st. and shape armholes by casting off 3 sts. at the beginning of each row. Change to No. 10 needles and work in pattern for 3". Cast off.

LEFT FRONT: Using No. 10 needles, cast on 65 sts. loosely. (Do not K into back of sts.).

Isi Row: K5, P to last st., K1.

2nd Row: \* K1, P2 tog., P the loop between sts., P1, P loop between sts., P2 tog., repeat from \* to last 5 sts., K5.

Work in pattern, keeping 5 border sts. in garter st. When work measures 9", change to No. 12 needles and decrease as follows:—(Right side of work facing you) \* K2 tog., repeat from \* to last 5 sts., K5. (35 sts.).

K 3 rows. Work ribbonholes as follows:— K1, \* w.r.n. twice, K2 tog., repeat from \* to end of row.

Next Row: K to end of row, working w.r.n. twice as 1 st.

Next Row: Shape armhole by casting off 5 sts., K to end of row.

Next Row: K to last 2 sts., K2 tog.

Change to No. 10 needles and continue in pattern, commencing with 2nd pattern row, right side of work. When yoke measures 2", shape neck by casting off 8 sts. at centre front edge of the next row. Decrease 1 st. at neck edge on the next 4 rows. When yoke measures 3", cast off.

RIGHT FRONT: Using No. 10 needles, cast on 65 sts. loosely. (Do not K into back of sts.).

1st Row: K1, P to last 5 sts., K5.

2nd Row: K5, \* P2 tog., P the loop between sts., P1, P the loop between sts., P2 tog., K1, repeat from \* to end of row.

Repeat last 2 rows for 9". Change to No. 12 needles and decrease as follows:—

Next Row: Right side of work facing, K5, \* K2 tog., repeat from \* to end of row. (35 sts.).

K 3 rows. Work ribbonholes, K1, \* w.r.n. twice, K2 tog., repeat from \* to end.

DESIGN No. 903 Continued.

Next Row: K, working w.r.n. twice as 1 st. Next Row: K.

Next Row: Shape armhole by casting off 5 sts., K to end.

Next Row: Change to No. 10 needles, work in pattern and decrease 1 st. at end of 1st pattern row. (29 sts.).

Work 5 border sts. in garter st. When yoke measures 2", shape neck by casting off 8 sts. at centre front edge on the next row. Decrease 1 st. at neck edge on the next 4 rows. When yoke measures 3", cast off.

**SLEEVES:** Using No. 10 needles, cast on 36 sts.

Work 16 rows rib of K1, P1.

Increase to 55 sts. on next row as follows:—
\* K1, K twice into next st., repeat from \*
to last 2 sts., K twice into each of last 2 sts.
Next Row: P.

Work in pattern as for back, commencing with 2nd pattern row. When sleeve seam measures 6", cast off 3 sts. at the beginning of every row until decreased to 19 sts. Cast off.

TO MAKE UP: Using a warm iron and damp cloth, press lightly on wrong side of work. Sew up shoulder seams. Sew in sleeves, sew up side and sleeve seams.

TO WORK NECKBAND: Using No. 12 needles, with right side of work facing year pick up and K 68 sts. around neck edge. P 1 row, then work ribbonholes as follows:—

K1, \* w.r.n. twice, K2 tog., repeat from \* to last st., K1.

Next Row: P, working w.r.n. twice as 1 st. Cast off.

Thread ribbon through waist and neck and work rosebuds.

### BONNET

Using No. 10 needles, cast on 73 sts. loosely. (Do not K into back of sts.).

Work in pattern as for back of coat. When work measures 5", decrease for back as follows:—

1st Row: \* K8, K2 tog., repeat from \* to last 3 sts., K3.

2nd and alternate Rows: K.

3rd Row: \* K7, K2 tog., repeat from \* to last 3 sts., K3.

Page 12

5th Row: \* K6, K2 tog., repeat from \* to last 3 sts., K3.

7th Row: \* K5, K2 tog., repeat from \* to last 3 sts., K3.

9th Row: \* K4, K2 tog., repeat from \* to last 3 sts., K3.

11th Row: \* K3, K2 tog., repeat from \* to last 3 sts., K3.

13th Row: \* K2, K2 tog., repeat from \* to last 3 sts., K3.

15th Row: \* K1, K2 tog., repeat from \* to end of row.

17th Row: \* K2 tog., repeat from \* to end of row.

Break off length of wool, thread through darning needle, then draw through all sts. and fasten off. Sew up back seam.

TO MAKE UP: Press lightly on wrong side of work. Sew on ribbon. Work rosebuds.

# **BOOTEES**

Using No. 10 needles, commence at top of bootees and cast on 37 sts. loosely. (Do not K into back of sts.). Work in pattern as for back of coat for 3", ending on a P row.

Next Row: K.

Next Row: P.

Next Row: Work ribbonholes:—K1, \* w.r.n. twice, K2 tog., repeat from \* to end of row.

Next Row: P, working w.r.n. twice as 1 st. Next Row: K25, turn, P13.

Work 16 rows st.st. on these 13 sts.

Next Row: K13, pick up and K12 sts. down side of flap, K12.

Next Row: K37, pick up and K12 sts. down other side of flap, K12. (61 sts.).

K 6 rows. Shape foot as follows:-

1st Row: K1, K2 tog., K25, K2 tog., K1, K2 tog., K25, K2 tog., K1.

2nd and alternate Rows: K.

3rd Row: K1, K2 tog., K23, K2 tog., K1, K2 tog., K23, K2 tog., K1.

5th Row: K1, K2 tog., K21, K2 tog., K1, K2 tog., K21, K2 tog., K1.

7th Row: K1, K2 tog., K19, K2 tog., K1, K2 tog., K19, K2 tog., K1.

9th Row: K1, K2 tog., K17, K2 tog., K1, K2 tog., K17, K2 tog., K1.

10th Row: K. Cast off.

TO MAKE UP: Press lightly on wrong side of work. Sew up leg and foot seams. Thread ribbon through ribbonholes. Work rosebuds.

DESIGN No. 813 Continued.

**POCKETS** (2): Using No. 10 needles, cast on 18 sts. Work in st.st. for  $2\frac{1}{2}$ ", ending with a K row. Leave on a spare needle.

**LEFT FRONT:** Using No. 10 needles, cast on 48 sts. K 12 rows. Work in pattern, keeping 6 sts. in garter st. at centre front edge to form border.

When work measures 3", work pocket as follows:—

Next Row: Work 12 sts., K18, work to end of row.

Next Row: Work 18 sts., K18, work 12 sts. Repeat last 2 rows twice for pocket top.

Next Row: Work 12 sts., cast off 18 sts., work 18 sts.

Next Row: Work 18 sts., work 18 sts. of one pocket, work 12 sts.

Continue in pattern, keeping the 6 border sts. in garter st. When work measures 9", shape armhole by casting off 4 sts. at the armhole edge, work to last 8 sts., K2 tog., K6.

Decrease 1 st. at the armhole edge on the

next 3 rows, then every 2nd row 3 times, and at the same time, decrease 1 st. inside front border every 2nd row until decreased to 24 sts. When armhole measures 4'', shape shoulder by casting off 6 sts. at the armhole edge every 2nd row 3 times. Work the remaining 6 sts. for  $1\frac{1}{2}''$ . Cast off.

RIGHT FRONT: Work to correspond with left front, working border at opposite end, and making buttonholes as follows:—1st one being ½" from lower edge and 4 more 2" apart.

BUTTONHOLES—1st Row: K2, cast off 3 sts., work to end of row.

**2nd Row:** Work to last 2 sts., cast on 3 sts., K2.

**SLEEVES:** Work the same as sleeves of jumper.

TO MAKE UP: Press with a warm iron and damp cloth. Sew up shoulder seams. Sew in sleeves. Sew up side and sleeve seams. Join borders at back of neck. Cover buttons the same as for jumper and sew on left front. Stitch down pockets. Work rosebuds on pocket tops.



# -DESIGN No.

TWIN SET - JUMPER

(Illustrated Opposite)

HUGHES TWINPRUFE BABY WOOL

MATERIALS REQUIRED FOR JUMPER: 3 Balls;

pairs needles Nos. 10 and 12: 1 crochet hook; 2 small button moulds, silk for rosebuds.

MEASUREMENTS: Length from top of shoulder 13". Chest 22". Length of sleeve seam 9".

TENSION: 7 sts. 1". 9 rows 1".

BACK: Using No. 12 needles, cast on 82 sts. Work in rib of K1, P1 for 2". Change to No. 10 needles and work in following pattern:-

1st Row: P.

2nd Row: K.

3rd Row: P2, \* K4, (twist 2 thus:-K into front of 2nd st. on left-hand needle, but do not slip off, K into back of 1st st. and slip both sts. off together) twice, P2, repeat from \* to end.

4th and alternate Rows: \* K2, P8, repeat from \* to last 2 sts., K2.

5th Row: P2, \* K3, twist 2 twice, K1, P2, repeat from \* to end.

7th Row: P2, \* K2, twist 2 twice, K2, P2. repeat from \* to end.

9th Row: P2, \* K1, twist 2 twice, K3, P2, repeat from \* to end.

11th Row: P2, \* twist 2 twice, K4, P2, repeat from \* to end.

12th Row: Repeat 4th row.

Repeat the last 12 rows and when work measures 9" shape armholes by casting off 4 sts. at the beginning of the next 2 rows. Decrease 1 st. each end of the next 3 rows,

then every 2nd row 3 times. When armholes measure 4", shape shoulders by casting off 6 sts. at the beginning of the next 6 rows. Cast off.

FRONT: Work as for back until armholes measure  $2\frac{1}{2}$ ". Shape as follows:—Work 24 sts. (leave on a spare needle), cast off 14 sts., work 24 sts.

Work on last 24 sts., decreasing 1 st. at neck edge of the next 3 rows, then every 2nd row until decreased to 18 sts. When armhole measures 4" shape shoulder by casting off 6 sts. at the armhole edge every 2nd row 3 times. Join wool at neck edge and work other side to correspond.

SLEEVES: Using No. 12 needles, cast on 52 sts. Work in rib of K1, P1 for 2". Change to No. 10 needles and work in pattern as for back, increasing 1 st. each end of every 6th row until increased to 62 sts. When sleeve seam measures 9", or required length, decrease 1 st. each end of every row until decreased to 18 sts. Cast off.

NECKBAND: Join right shoulder seam and join left shoulder seam for  $\frac{1}{4}$ ". Using No. 12 needles and with right side of work towards you, pick up and K 78 sts. around neck. Work 5 rows rib of K1, P1. Cast off in ribbing.

COVERING FOR BUTTONS: Using No. 12 needles, cast on 3 sts. Work in garter st., increasing 1 st. each end of every row until increased to 11 sts. Work 3 rows, then decrease 1 st. each end of every row until decreased to 3 sts. Cast off. Work a rosebud on each before covering button moulds.

TO MAKE UP: Press with a warm iron and damp cloth. Work 2 rows of D.C. around neck and shoulder opening, work 2 loops in chain to form button loops. Sew in sleeves, sew up side and sleeve seams. Finish with covered buttons.

# DESIGN No. 813

### CARDIGAN

## HUGHES TWINPRUFE BABY WOOL

MATERIALS REQUIRED: 3 Balls:

2 pairs needles Nos. 10 and 12; 1 crochet hook; 5 small button moulds; silk for rosebuds.

MEASUREMENTS: Length from top of shoulder 13". Chest 22". Length of sleeve seam 9".

TENSION: 7 sts. 1". 9 rows 1".

BACK: Using No. 10 needles, cast on 82 sts. K 12 rows.

Work as for back of jumper, but omit the 1st 2 rows of pattern to commence with. Shape armholes and shoulders as for back of jumper.


Continued Page 13.

Published with all rights reserved by F. W. Hughes Industries Ltd., 30 Grosvenor Street, Sydney, and printed by Mockridge, Bulmer Pty. Ltd., 259 Penshurst Street, Willoughby, N.S.W.



# Hughes KNITTING BOOK 227

FEATURING
BABY'S
DESIGNS
6—18 MONTHS

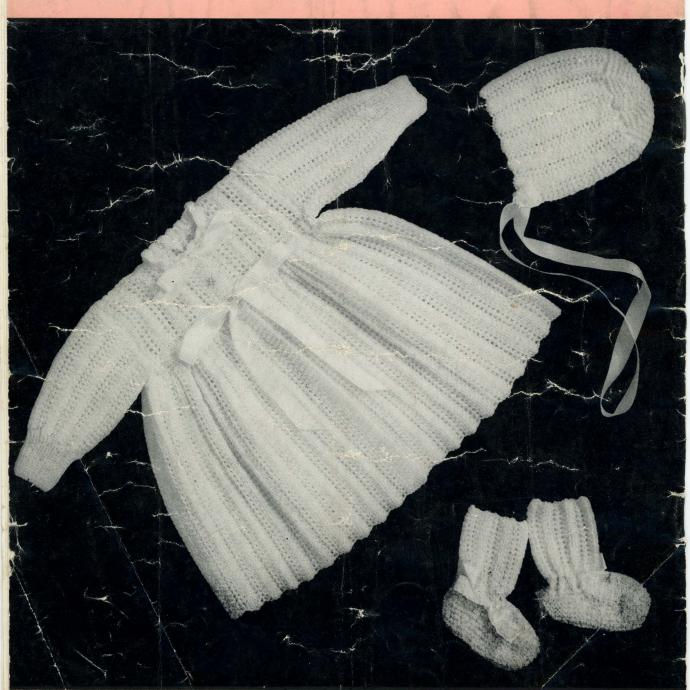

TWINPRUFE BABY WOOL

PRICE: 1/9